



1/11

(a) "OSI&ISDN Illustrated Term Dictionary" by Kinji Ono et al. Ohmsha Ltd. (1989)

## ISDN USER · NET INTERFACE (3)

### PROTOCOL STRUCTURE

P. 98

..... omitted .....  
(lines 22 - 28)

Layer 3 of "ISDN User · Net Interface" specifies information on the D channel transmitted between the user and the net by Layer 1 and Layer 2, and a procedure using the information (CCITT Recommendation I.451). The information on the D channel specified by Layer 3 is called a message, and used for call control such as calling and cutting the calling. One message is composed of a plurality of information elements in order to indicate contents relating to the call control. By transferring this message onto the D channel, call control of line change can be performed.

.....omitted.....

(b) Japanese Unexamined Patent Publication No. JP5-284237  
[0048]

In the I Interface, a signal of Layer 3 of the procedure (LAPD) on the D channel is called a message, and composed of a common part and an individual part as shown in Fig. 16 (a). The common part is commonly included in all the messages (that is, all the signals) and composed of three elements: a protocol discriminator, a call reference, and a message type.

(c) Japanese Unexamined Patent Publication No. JP5-327932  
[0004]

ISDN service started in Japan in 1988, and is going to prevail from now on. In ISDN, things specifying connection conditions at the border point (restriction point) in the case of connecting a terminal with a network are called "User · Net Interface", and specified by CCITT as I.400 Series Recommendation. The ISDN service is controlled by information of Layer 3 (Network Layer), and the information of Layer 3 is generally called a message. Call control is realized by sending/receiving messages such as call setting, responding and disconnecting performed among a calling side, the net, and a called side.

(d) 3GPP TS 25.301 V3.11.0 (Pages p.1 - p.10 of English Documents are attached.)

B 2/11

# 3GPP TS 25.301 V3.11.0 (2002-09)

*Technical Specification*

**3rd Generation Partnership Project;  
Technical Specification Group Radio Access Network;  
Radio Interface Protocol Architecture  
(Release 1999)**



The present document has been developed within the 3<sup>rd</sup> Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP.

The present document has not been subject to any approval process by the 3GPP Organisational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organisational Partners accept no liability for any use of this Specification. Specifications and reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organisational Partners' Publications Offices.

B 3/11

Release 1999

2

3GPP TS 25.301 V3.11.0 (2002-09)

Keywords

UMTS, radio, architecture

**3GPP**

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2002, 3GPP Organizational Partners (ARIB, CWTS, ETSI, T1, TTA, TTC).  
All rights reserved.



## Contents

|                                                                             |    |
|-----------------------------------------------------------------------------|----|
| Foreword.....                                                               | 5  |
| 1 Scope .....                                                               | 6  |
| 2 References .....                                                          | 6  |
| 3 Definitions and abbreviations .....                                       | 6  |
| 3.1 Definitions .....                                                       | 6  |
| 3.2 Abbreviations .....                                                     | 7  |
| 4 Assumed UMTS Architecture .....                                           | 8  |
| 5 Radio interface protocol architecture .....                               | 9  |
| 5.1 Overall protocol structure .....                                        | 9  |
| 5.1.1 Service access points and service primitives .....                    | 10 |
| 5.2 Layer 1 Services and Functions .....                                    | 11 |
| 5.2.1 L1 Services .....                                                     | 11 |
| 5.2.1.1 Transport channels .....                                            | 12 |
| 5.2.2 L1 Functions .....                                                    | 12 |
| 5.3 Layer 2 Services and Functions .....                                    | 13 |
| 5.3.1 MAC Services and Functions .....                                      | 13 |
| 5.3.1.1 MAC Services to upper layers .....                                  | 13 |
| 5.3.1.1.1 Logical channels .....                                            | 13 |
| 5.3.1.1.2 Mapping between logical channels and transport channels .....     | 15 |
| 5.3.1.1.2.1 Mapping in Uplink .....                                         | 15 |
| 5.3.1.1.2.2 Mapping in Downlink .....                                       | 15 |
| 5.3.1.2 MAC functions .....                                                 | 16 |
| 5.3.2 RLC Services and Functions .....                                      | 17 |
| 5.3.2.1 Services provided to the upper layer .....                          | 17 |
| 5.3.2.2 RLC Functions .....                                                 | 18 |
| 5.3.3 PDCP Services and Function .....                                      | 19 |
| 5.3.3.1 PDCP Services provided to upper layers .....                        | 19 |
| 5.3.3.2 PDCP Functions .....                                                | 19 |
| 5.3.4 Broadcast/Multicast Control - Services and functions .....            | 19 |
| 5.3.4.1 BMC Services .....                                                  | 19 |
| 5.3.4.2 BMC Functions .....                                                 | 19 |
| 5.3.5 Data flows through Layer 2 .....                                      | 19 |
| 5.3.5.1 Data flow for BCCH mapped to BCH .....                              | 22 |
| 5.3.5.2 Data flow for BCCH mapped to FACH .....                             | 22 |
| 5.3.5.3 Data flow for PCCH mapped to PCH .....                              | 22 |
| 5.3.5.4 Data flow for CCCH mapped to FACH/RACH .....                        | 22 |
| 5.3.5.5 Data flow for SHCCH mapped to USCH .....                            | 22 |
| 5.3.5.6 Data flow for SHCCH mapped to FACH/RACH .....                       | 22 |
| 5.3.5.7 Data flow for DCCH mapped to FACH/RACH .....                        | 23 |
| 5.3.5.8 Data flow for DCCH mapped to DSCH .....                             | 23 |
| 5.3.5.9 Data flow for DCCH mapped to USCH .....                             | 23 |
| 5.3.5.10 Data flow for DCCH mapped to CPCH .....                            | 23 |
| 5.3.5.11 Data flow for DTCH (non-transparent RLC) mapped to FACH/RACH ..... | 23 |
| 5.3.5.12 Data flow for DTCH (non-transparent RLC) mapped to DSCH .....      | 23 |
| 5.3.5.13 Data flow for DTCH (non-transparent RLC) mapped to USCH .....      | 23 |
| 5.3.5.14 Data flow for DTCH (transparent RLC) mapped to DCH .....           | 23 |
| 5.3.5.15 Data flow for DTCH (non-transparent RLC) mapped to DCH .....       | 23 |
| 5.3.5.16 Data flow for DTCH (non-transparent RLC) mapped to CPCH .....      | 23 |
| 5.3.5.17 Data flow for DCCH mapped to DCH .....                             | 24 |
| 5.3.5.18 Data flow for CTCH mapped to FACH .....                            | 24 |
| 5.3.6 Transport Channel and Logical Channel Numbering .....                 | 24 |
| 5.4 Layer 3 - Uu Stratum Services and Functions .....                       | 25 |
| 5.4.1 Uu Stratum services .....                                             | 25 |
| 5.4.1.1 General Control .....                                               | 25 |

B

5/11

Release 1999

4

3GPP TS 25.301 V3.11.0 (2002-09)

|                                             |                                                               |    |
|---------------------------------------------|---------------------------------------------------------------|----|
| 5.4.1.2                                     | Notification.....                                             | 25 |
| 5.4.1.3                                     | Dedicated Control.....                                        | 25 |
| 5.4.2                                       | RRC functions .....                                           | 26 |
| 5.5                                         | Interactions between RRC and lower layers in the C plane..... | 28 |
| 5.6                                         | Protocol termination .....                                    | 28 |
| 5.6.1                                       | Protocol termination for DCH .....                            | 28 |
| 5.6.2                                       | Protocol termination for RACH/FACH .....                      | 29 |
| 5.6.3                                       | Void .....                                                    | 31 |
| 5.6.4                                       | Protocol termination for CPCH .....                           | 31 |
| 5.6.5                                       | Protocol termination for DSCH .....                           | 31 |
| 5.6.5.1                                     | DSCH definition .....                                         | 31 |
| 5.6.5.2                                     | Resource allocation and UE identification on DSCH .....       | 32 |
| 5.6.5.2.1                                   | Case A (UE requires a downlink TFCI on a DPCH) .....          | 32 |
| 5.6.5.2.2                                   | Case B (UE requires a downlink SHCCH) (TDD only).....         | 32 |
| 5.6.5.3                                     | Model of DSCH in UTRAN .....                                  | 32 |
| 5.6.5.4                                     | Protocol termination .....                                    | 33 |
| 5.6.6                                       | Protocol termination for transport channel of type USCH.....  | 34 |
| 5.6.6.1                                     | USCH definition .....                                         | 34 |
| 5.6.6.2                                     | Resource allocation and UE identification on USCH .....       | 34 |
| 5.6.6.3                                     | Model of USCH in UTRAN .....                                  | 34 |
| 5.6.6.4                                     | Protocol termination .....                                    | 35 |
| 5.6.7                                       | Protocol termination for transport channel of type BCH .....  | 36 |
| 5.6.8                                       | Protocol termination for transport channel of type PCH.....   | 36 |
| 6                                           | User Identification and RRC Connection Mobility.....          | 37 |
| 6.1                                         | UE identification on the radio interface.....                 | 37 |
| 6.2                                         | UE connection to UTRAN .....                                  | 37 |
| 7                                           | UE modes .....                                                | 38 |
| Annex A (Informative): Change history ..... |                                                               | 39 |

B

Release 1999

5

3GPP TS 25.301 V3.11.0 (2002-09)

6/11

---

## Foreword

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

x the first digit:

- 1 presented to TSG for information;
- 2 presented to TSG for approval;
- 3 or greater indicates TSG approved document under change control.

y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.

z the third digit is incremented when editorial only changes have been incorporated in the document.



Release 1999

6

3GPP TS 25.301 V3.11.0 (2002-09)

---

## 1 Scope

The present document shall provide an overview and overall description of the UE-UTRAN radio interface protocol architecture as agreed within the 3GPP TSG RAN working group 2. Details of the radio protocols will be specified in companion documents.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 23.110: "UMTS Access Stratum; Services and Functions".
- [2] 3GPP TS 25.401: "RAN Overall Description".
- [3] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [4] 3GPP TS 25.302: "Services provided by the Physical Layer".
- [5] 3GPP TS 25.303: "Interlayer Procedures in Connected Mode".
- [6] 3GPP TS 25.304: "UE Procedures in Idle Mode and Procedures for Cell Reselection in Connected Mode".
- [7] 3GPP TS 25.321: "MAC Protocol Specification".
- [8] 3GPP TS 25.322: "RLC Protocol Specification".
- [9] 3GPP TS 25.323: "PDCP Protocol Specification".
- [10] 3GPP TS 25.324: "BMC Protocol Specification".
- [11] 3GPP TS 25.331: "RRC Protocol Specification".
- [12] 3GPP TS 25.224: "Physical Layer Procedures (TDD)".
- [13] 3GPP TS 24.007: "Mobile radio interface signalling layer 3; General aspects".
- [14] 3GPP TS 33.105: "Cryptographic Algorithm Requirements".
- [15] 3GPP TS 33.102: "Security Architecture".
- [16] 3GPP TS 04.05: "Data Link (DL) layer; General aspects".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in [3] apply.

B

8/11

Release 1999

7

3GPP TS 25.301 V3.11.0 (2002-09)

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

|        |                                       |
|--------|---------------------------------------|
| ARQ    | Automatic Repeat Request              |
| AS     | Access Stratum                        |
| ASC    | Access Service Class                  |
| BCCH   | Broadcast Control Channel             |
| BCH    | Broadcast Channel                     |
| BMC    | Broadcast/Multicast Control           |
| C-     | Control-                              |
| CC     | Call Control                          |
| CCCH   | Common Control Channel                |
| CCH    | Control Channel                       |
| CCTrCH | Coded Composite Transport Channel     |
| CN     | Core Network                          |
| CPCH   | Common Packet channel                 |
| CRC    | Cyclic Redundancy Check               |
| CTCH   | Common Traffic Channel                |
| DC     | Dedicated Control (SAP)               |
| DCA    | Dynamic Channel Allocation            |
| DCCH   | Dedicated Control Channel             |
| DCH    | Dedicated Channel                     |
| DL     | Downlink                              |
| DRNC   | Drift Radio Network Controller        |
| DSCH   | Downlink Shared Channel               |
| DTCH   | Dedicated Traffic Channel             |
| FACH   | Forward Link Access Channel           |
| FCS    | Frame Check Sequence                  |
| FDD    | Frequency Division Duplex             |
| GC     | General Control (SAP)                 |
| HO     | Handover                              |
| ITU    | International Telecommunication Union |
| kbps   | kilobits per second                   |
| L1     | Layer 1 (physical layer)              |
| L2     | Layer 2 (data link layer)             |
| L3     | Layer 3 (network layer)               |
| LAC    | Link Access Control                   |
| LAI    | Location Area Identity                |
| MAC    | Medium Access Control                 |
| MM     | Mobility Management                   |
| NAS    | Non-Access Stratum                    |
| Nt     | Notification (SAP)                    |
| PCCH   | Paging Control Channel                |
| PCH    | Paging Channel                        |
| PDCP   | Packet Data Convergence Protocol      |
| PDU    | Protocol Data Unit                    |
| PHY    | Physical layer                        |
| PhyCH  | Physical Channels                     |
| RAB    | Radio Access Bearer                   |
| RACH   | Random Access Channel                 |
| RB     | Radio Bearer                          |
| RLC    | Radio Link Control                    |
| RNC    | Radio Network Controller              |
| RNS    | Radio Network Subsystem               |
| RNTI   | Radio Network Temporary Identity      |
| RRC    | Radio Resource Control                |
| SAP    | Service Access Point                  |
| SDU    | Service Data Unit                     |
| SHCCH  | Shared Channel Control Channel        |
| SRNC   | Serving Radio Network Controller      |
| SRNS   | Serving Radio Network Subsystem       |



B

Release 1999

8

3GPP TS 25.301 V3.11.0 (2002-09)

9/11

|       |                                            |
|-------|--------------------------------------------|
| TCH   | Traffic Channel                            |
| TDD   | Time Division Duplex                       |
| TFCI  | Transport Format Combination Indicator     |
| TFI   | Transport Format Indicator                 |
| TMSI  | Temporary Mobile Subscriber Identity       |
| TPC   | Transmit Power Control                     |
| U-    | User-                                      |
| UE    | User Equipment                             |
| UL    | Uplink                                     |
| UMTS  | Universal Mobile Telecommunications System |
| URA   | UTRAN Registration Area                    |
| USCH  | Uplink Shared Channel                      |
| UTRA  | UMTS Terrestrial Radio Access              |
| UTRAN | UMTS Terrestrial Radio Access Network      |
| UuS   | Uu (Radio Interface) Stratum               |

## 4 Assumed UMTS Architecture

Figure 1 shows the assumed UMTS architecture as outlined in [1]. The figure shows the UMTS architecture in terms of its entities User Equipment (UE), UTRAN and Core Network. The respective reference points Uu (Radio Interface) and Iu (CN-UTRAN interface) are shown. The figure illustrates furthermore the high-level functional grouping into the Access Stratum and the Non-Access Stratum.

The Access Stratum offers services through the following Service Access Points (SAP) to the Non-Access Stratum:

- General Control (GC) SAPs;
- Notification (Nt) SAPs; and
- Dedicated Control (DC) SAPs.

The SAPs are marked with circles in Figure 1.

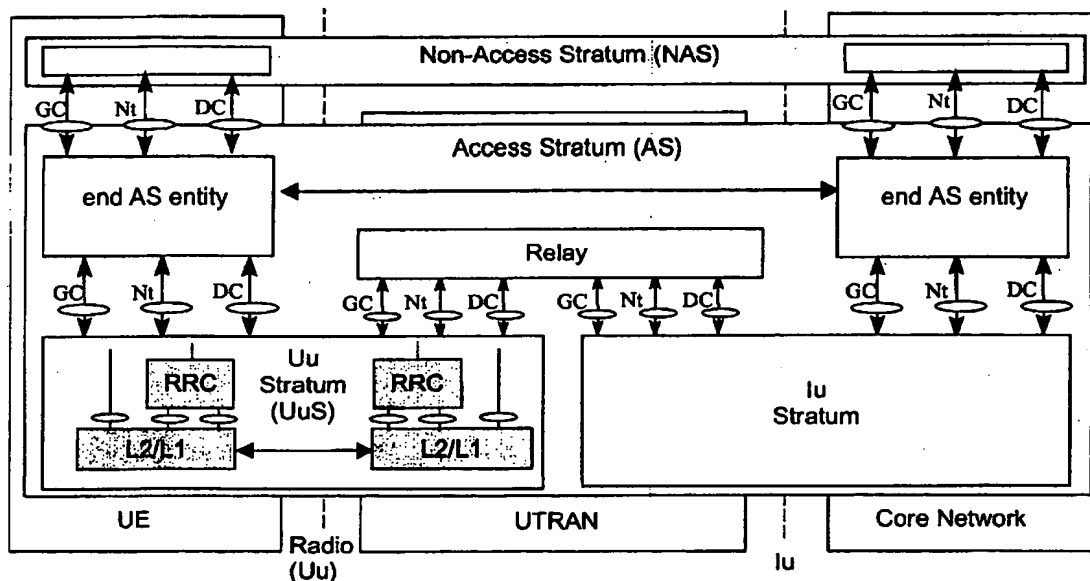


Figure 1: Assumed UMTS Architecture

The model in Figure 1 distinguishes the end AS entities [1], which provide the services to higher layers, from the local entities, which provide services over respectively the Uu and the Iu reference points.



Release 1999

9

3GPP TS 25.301 V3.11.0 (2002-09)

10/11

The Uu Stratum (UuS) block includes the radio interface protocol stack described in subclause 5.1.

## 5 Radio interface protocol architecture

### 5.1 Overall protocol structure

The radio interface is layered into three protocol layers:

- the physical layer (L1);
- the data link layer (L2);
- network layer (L3).

Layer 2 is split into following sublayers: Medium Access Control (MAC), Radio Link Control (RLC), Packet Data Convergence Protocol (PDCP) and Broadcast/Multicast Control (BMC).

Layer 3 and RLC are divided into Control (C-) and User (U-) planes. PDCP and BMC exist in the U-plane only.

In the C-plane, Layer 3 is partitioned into sublayers where the lowest sublayer, denoted as Radio Resource Control (RRC), interfaces with layer 2 and terminates in the UTRAN. The next sublayer provides 'Duplication avoidance' functionality as specified in [13]. It terminates in the CN but is part of the Access Stratum; it provides the Access Stratum Services to higher layers. The higher layer signalling such as Mobility Management (MM) and Call Control (CC) is assumed to belong to the non-access stratum, and therefore not in the scope of 3GPP TSG RAN. On the general level, the protocol architecture is similar to the current ITU-R protocol architecture, ITU-R M.1035.

Figure 2 shows the radio interface protocol architecture. Each block in Figure 2 represents an instance of the respective protocol. Service Access Points (SAP) for peer-to-peer communication are marked with circles at the interface between sublayers. The SAP between MAC and the physical layer provides the transport channels (cf. subclause 5.2.1.1). The SAPs between RLC and the MAC sublayer provide the logical channels (cf. subclause 5.3.1.1.1). The RLC layer provides three types of SAPs, one for each RLC operation mode (UM, AM, and TM, see [8]). PDCP and BMC are accessed by PDCP and BMC SAPs, respectively. The service provided by layer 2 is referred to as the radio bearer. The C-plane radio bearers, which are provided by RLC to RRC, are denoted as signalling radio bearers. In the C-plane, the interface between 'Duplication avoidance' and higher L3 sublayers (CC, MM) is defined by the General Control (GC), Notification (Nt) and Dedicated Control (DC) SAPs.

**NOTE:** The SAPs shown in Figure 2 are examples. For details on the definition of SAPs refer to the respective radio interface protocol specification.

Also shown in the figure are connections between RRC and MAC as well as RRC and L1 providing local inter-layer control services. An equivalent control interface exists between RRC and the RLC sublayer, between RRC and the PDCP sublayer and between RRC and BMC sublayer. These interfaces allow the RRC to control the configuration of the lower layers. For this purpose separate Control SAPs are defined between RRC and each lower layer (PDCP, RLC, MAC, and L1).

The RLC sublayer provides ARQ functionality closely coupled with the radio transmission technique used. There is no difference between RLC instances in C and U planes.

The UTRAN can be requested by the CN to prevent all loss of data (i.e. independently of the handovers on the radio interface), as long as the lu connection point is not modified. This is a basic requirement to be fulfilled by the UTRAN retransmission functionality as provided by the RLC sublayer.

However, in case of the lu connection point is changed (e.g. SRNS relocation, streamlining), the prevention of the loss of data may not be guaranteed autonomously by the UTRAN but relies on 'Duplication avoidance' functions in the CN.

There are primarily two kinds of signalling messages transported over the radio interface - RRC generated signalling messages and NAS messages generated in the higher layers. On establishment of the signalling connection between the peer RRC entities three or four UM/AM signalling radio bearers may be set up. Two of these bearers are set up for transport of RRC generated signalling messages - one for transferring messages through an unacknowledged mode RLC entity (see subclause 5.3.2. for details on RLC modes) and the other for transferring messages through an acknowledged mode RLC entity. One signalling radio bearer is set up for transferring NAS messages set to "high priority" by the higher layers. An optional signalling radio bearer may be set up for transferring NAS messages set to "low priority" by

B

Release 1999

10

3GPP TS 25.301 V3.11.0 (2002-09)

the higher layers. Subsequent to the establishment of the signalling connection zero to several TM signalling radio bearers may be set up for transferring RRC signalling messages using transparent mode RLC.

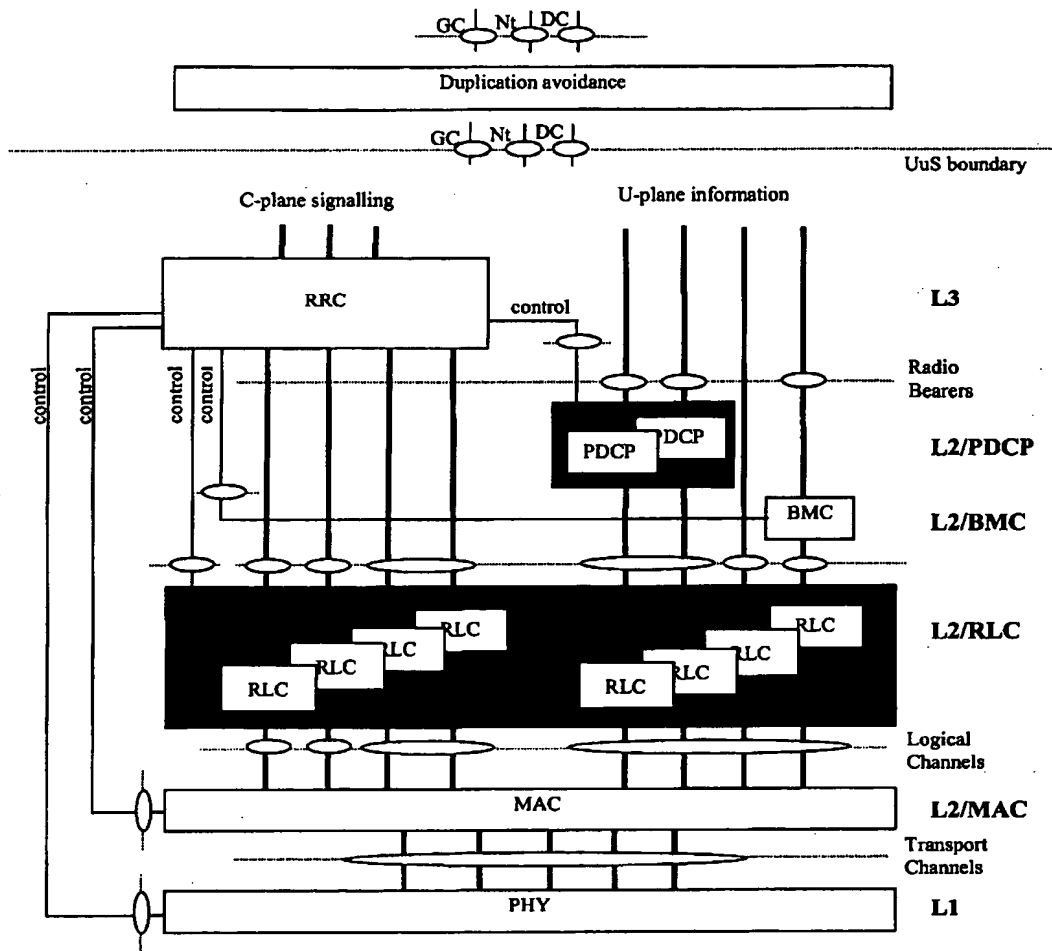


Figure 2: Radio Interface protocol architecture (Service Access Points marked by circles)

### 5.1.1 Service access points and service primitives

Each layer provides services at Service Access Points (SAPs). A service is defined by a set of service primitives (operations) that a layer provides to upper layer(s).

Control services, allowing the RRC layer to control lower layers locally (i.e. not requiring peer-to-peer communication) are provided at Control SAPs (C-SAP). Note that C-SAP primitives can bypass one or more sublayers, see Figure 2.

In the radio interface protocol specifications, the following naming conventions for primitives shall be applicable:

- Primitives provided by SAPs between adjacent layers shall be prefixed with the name of the service-providing layer, i.e. PHY, MAC, RLC, PDCP, BMC or UUS.
- Primitives provided by SAPs to an application shall be prefixed with the name of the service-providing layer, i.e. RRC.
- Primitives provided by Control SAPs, in addition to the name of the service-providing layer, shall be prefixed with a "C", i.e. CPHY, CMAC, CRLC, CPDCP or CBMC.